# Prompt The pursuit of purity

Our ideas and innovations are a part of the pursuit of maintaining the sanctity of milk so that the world's most ancient health drink can be appreciated as it truly is - untouched and unadulterated.



28 states



中resence across
合合
50,000+ villages

900+ team members

Legacy of more than 3 decades

8 patented products  $(\star)$ 

## **Optimise your dairy business** with related products

#### Milk Analyzer


The Indiz Ultrasonic Milk Analyzer provides accurate milk parameter readings such as Fat, SNF, Added Water and Density and links it with the pay-out to the farmer in real-time. This increases transparency and profitability arising out of improvement in quality of milk collected.

#### DPMCU

The Data Processing Milk Collection Unit (DPMCU) has an integrated milk collection software that accepts data from Electronic Weighing Scale and Milk Analyzer. The DPU machine (with cloud connectivity) processes this data and prints milk slips through its in-built printer.





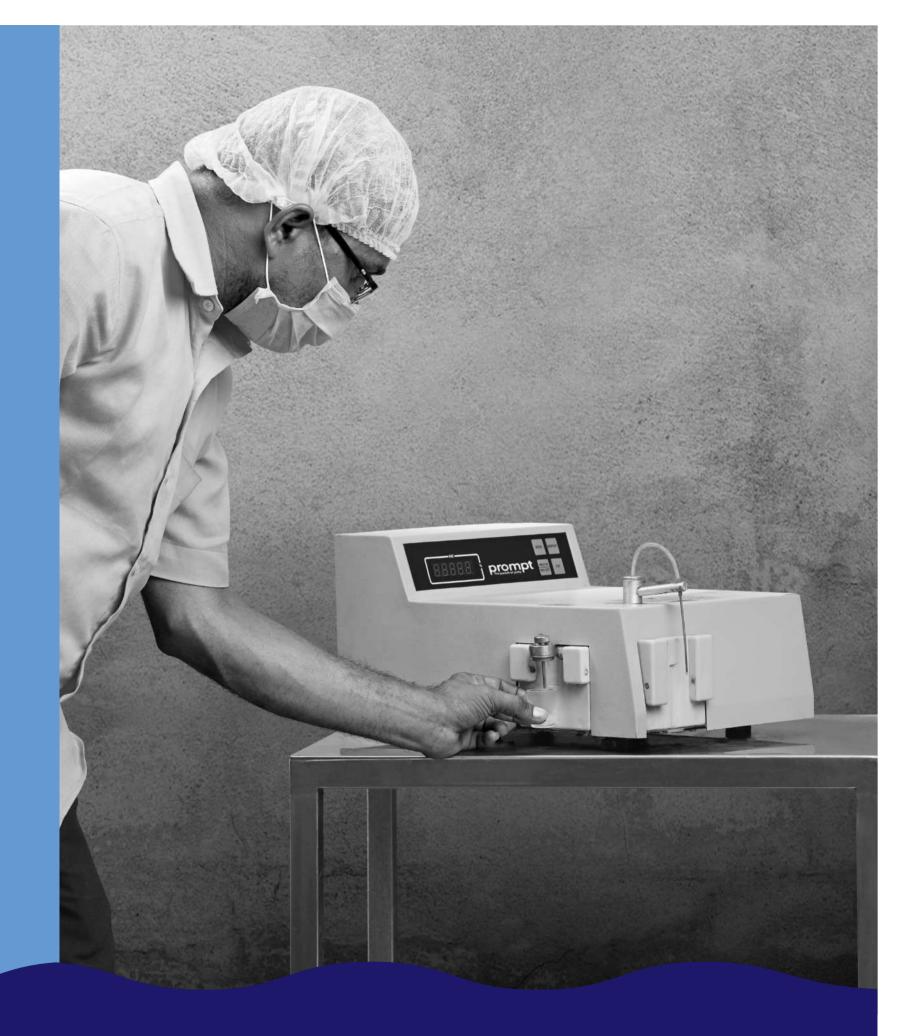

Prompt Equipments Pvt. Ltd. 7th Floor, Shaligram Corporates, Nr. Navratna Building, C J Marg Iscon - Ambli Road, Ahmedabad, Gujarat- 380058 (India) Ph: 02717 45 1111/6111 | info@promptdairytech.com | www.promptdairytech.com



Follow us on 😏 🖸 👖 in

**FAT'OMATIC** MILK FAT MEASURING MACHINE

# How do we keep it pure?

Prompt provides innovative solutions for an efficient dairy procurement supply chain. From farm management and milk collection to quality analysis and preservation, we have different equipment and software that ensure the purity of milk is maintained at every step. Our unique offering, the Fat'omatic is a patented fully automatic milk fat measuring machine that is fast, accurate, economical, and measures 250-280 samples an hour. Fat'omatic Milk Fat Measuring Machine ensures that the quality of the milk is uncompromised in a high throughput environment.

# Our product in this pursuit – **Fatomatic**

Milk Fat Measuring Machine A PATENTED PRODUCT (PATENT NUMBER - 205094)

#### **INDIA'S FIRST FULLY AUTOMATIC &** INDIGENOUS MILK FAT MEASURING MACHINE, SINCE 1999

The Fat'omatic Milk Fat Measuring Machine is a milk fat testing machine with rugged, tamper-proof design and has a big LED display. Over 50,000 machines have already been installed all over India. The machine uses light scattering technology to measure fat. Fat'omatic Milk Fat Measuring Machine is also available with cloud connectivity which offers online secured calibration.

Comes with auto-zero facility, proven measurement principle Tamper-proof & secured calibration through cloud (optional)

Excels in quality. accuracy, consistency, and repeatability

Being a 100% indigenous product, we have a strong service and support network across India

### INDIZ SEMI AUTOMATIC MILK FAT MEASURING MACHINE Auto start timer

- Front & rear dual display Auto zero facility
- Inbuilt battery charger
- Unique single PCB design
- Compatible with most computers
- Big, bright LED display
- Digital calibration with front keys

#### **TECHNICAL SPECIFICATIONS:**

Ca	pacity	250-280 samp
M	easuring Range	0-15% fat
Ac	curacy	0.06% for 0-59
Re	epeatability	0.03% for 0-59
Sa	mple Volume	0.5ml/test
Di	luent Volume	6.5ml/test
Di	splay Type and Size	7 seg LED, 1/2
Da	ata Interface	BCD OR RS 23
O	perating Temperature	5°C to 45°C
O	perating Voltage	230V AC +/- 15
Pc	ower Consumption	300w max
Fr	ont Keys	Zero, milk in/r
Er	closure	Powder coate
Di	mension	255 (H) x 460
W	eight	15kg

#### **FEATURES:**

- Fast and accurate
- Sensor-based motorised operation
- The machine comes without manual handle
- Uses single curve calibration
- Low operating and maintenance cost

#### WHAT ARE ITS BENEFITS?

#### Automated operations

It is an easy-to-use device that doesn't require the user to put in a lot of effort to get acquainted with its setup, cleaning process, and operation.

milk collection.

#### Three steps towards accuracy:

- 1. Sample bottle is placed under the invert-U shaped suction pipette. 0.5 ml milk will be sucked in.
- 2. Use empty beaker under the pipette to collect milk & fat solution mixture that comes out.
- 3. Place the beaker below the suction piece on left side of machine. Mixture gets sucked and fat% will be displayed in due time.

ples/hour
% fat, 0.10% for 5-8% fat, 0.20% for 8-15% fat
% fat, 0.04% for 5-8% fat, 0.07% for 8-15% fat
2 " size
32. Bluetooth (optional)
5%, 50Hz or 12V DC
mix out, repeat, fat
ed aluminium base, MS powder coated top
(L) X 345 (W) [mm]

- Battery mains Automatic changeover (AC-DC)
- Unique motor and gear design
- Inbuilt battery charger
- Minimal sampling
- Operates across wide range of operating voltage

Online secured calibration Cloud connectivity with secured calibration allows recording of calibration data, machine cleaning data, machine on-off data, milk sample data. This data helps in gathering insights about Eliminates human error Since the Fat'omatic is fully automated fat measuring machine, it reduces any scope of error due to manual intervention.